









PYLE
PyleUSA.com


POWER
OFF ON


PTA1000
2-Ch. Power Amplifier

-10 -5 0 +3 +6
+8 +10 +12 +14 +16 +18
0dB

POWER
PROTECT
CLIP
SIGNAL

-10 -5 0 +3 +6
+8 +10 +12 +14 +16 +18
0dB

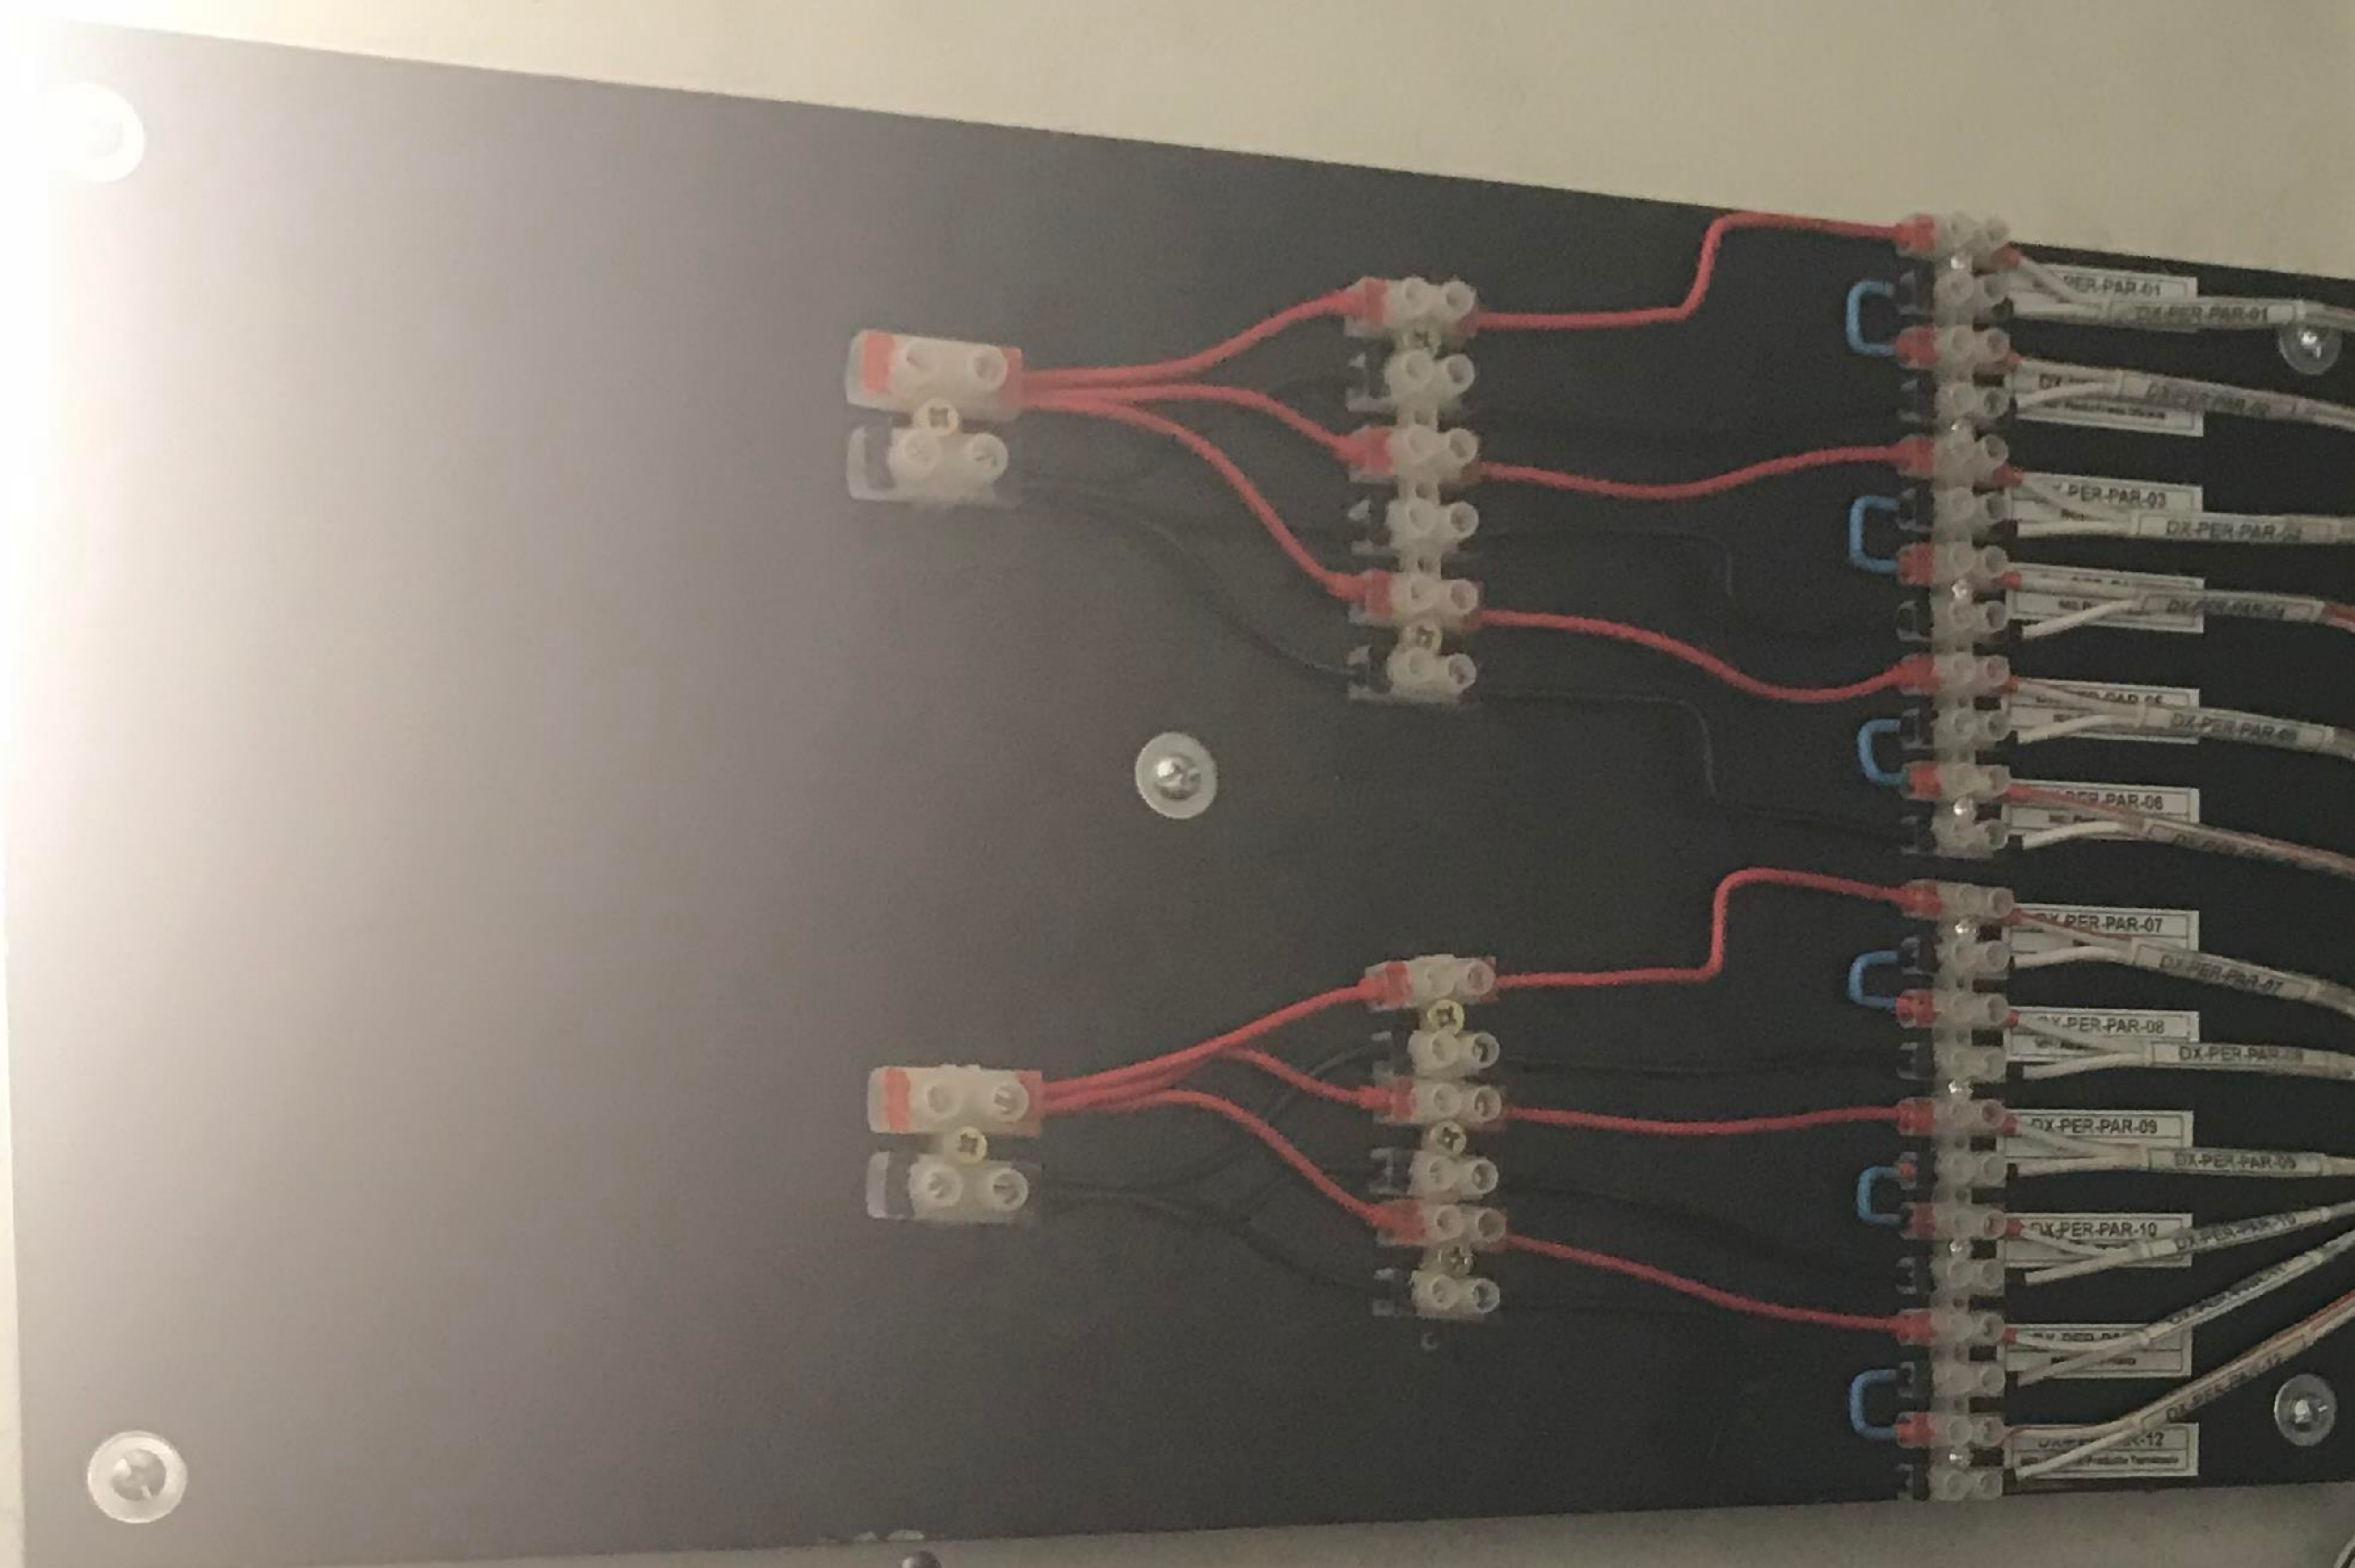

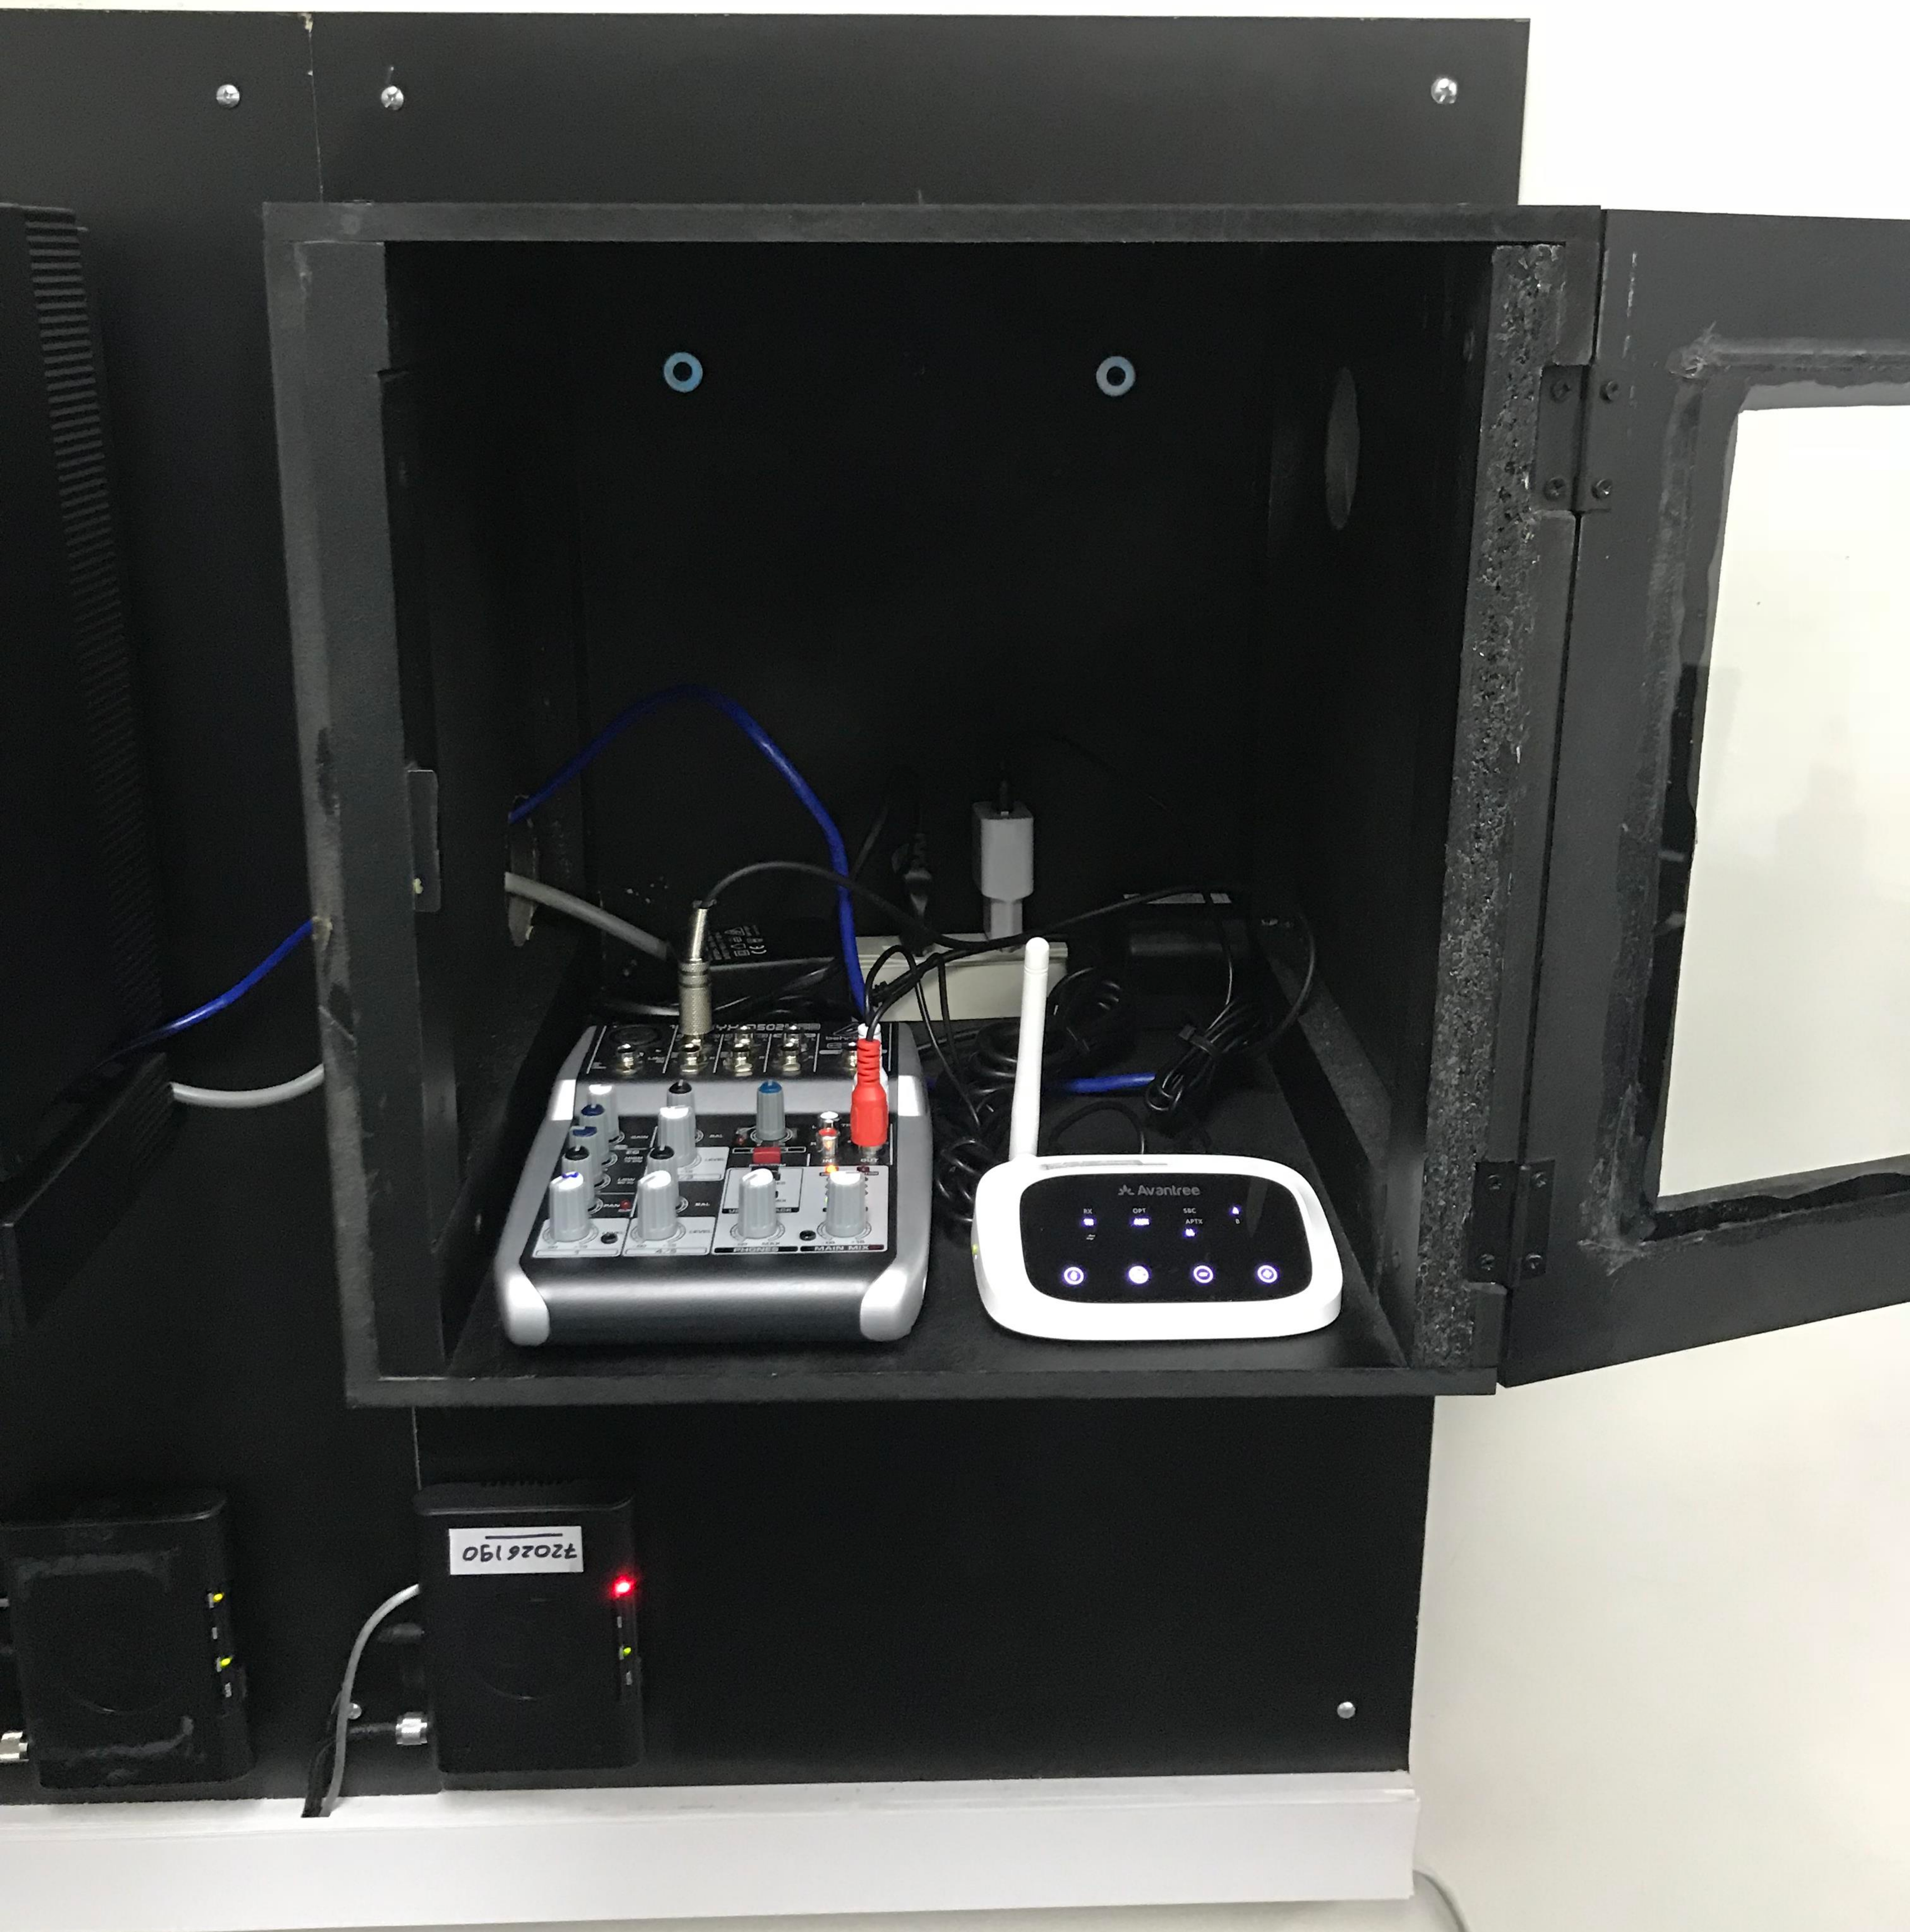

CAUTION: Static sensitive devices used. To protect the printed circuit board from static electricity, first discharge any body static by touching the ground terminal or wear the grounded strap.
CUIDADO: Dispositivos sensibles a la estática son usados para proteger la tarjeta del circuito electrónico de electricidad estática. Primero descargue cualquier cuerpo estático colocando el terminal de tierra o colocar pulsera de conexión a tierra.
TDE200BX-C1A

ON
OFF

BATTERY SW

POWER

AC IN

MCSLC24
CARD STATUS
3FBCC017258

CLCOT8
CARD STATUS
3FBCC017258

MCSLC24
CARD STATUS

EXN

EXTN

Back Board, D


DMPR
BATT
ALARM
SD ACCESS

RESET

INIT
NORMAL

MO/VEPO

CAUTION: Be sure to cover each slot in which no optional service card is installed by using a Blank Slot Cover. Failure to install the Blank Slot Cover may cause electromagnetic interference. CUIDADO: Asegúrese de cubrir todos los huecos de tarjeta de servicio que no tengan ninguna tarjeta de servicio instalada utilizando una cubierta en blanco. Si no instala la cubierta de la ranura en blanco se pueden producir interferencias electromagnéticas.
TDE200BX-C2A

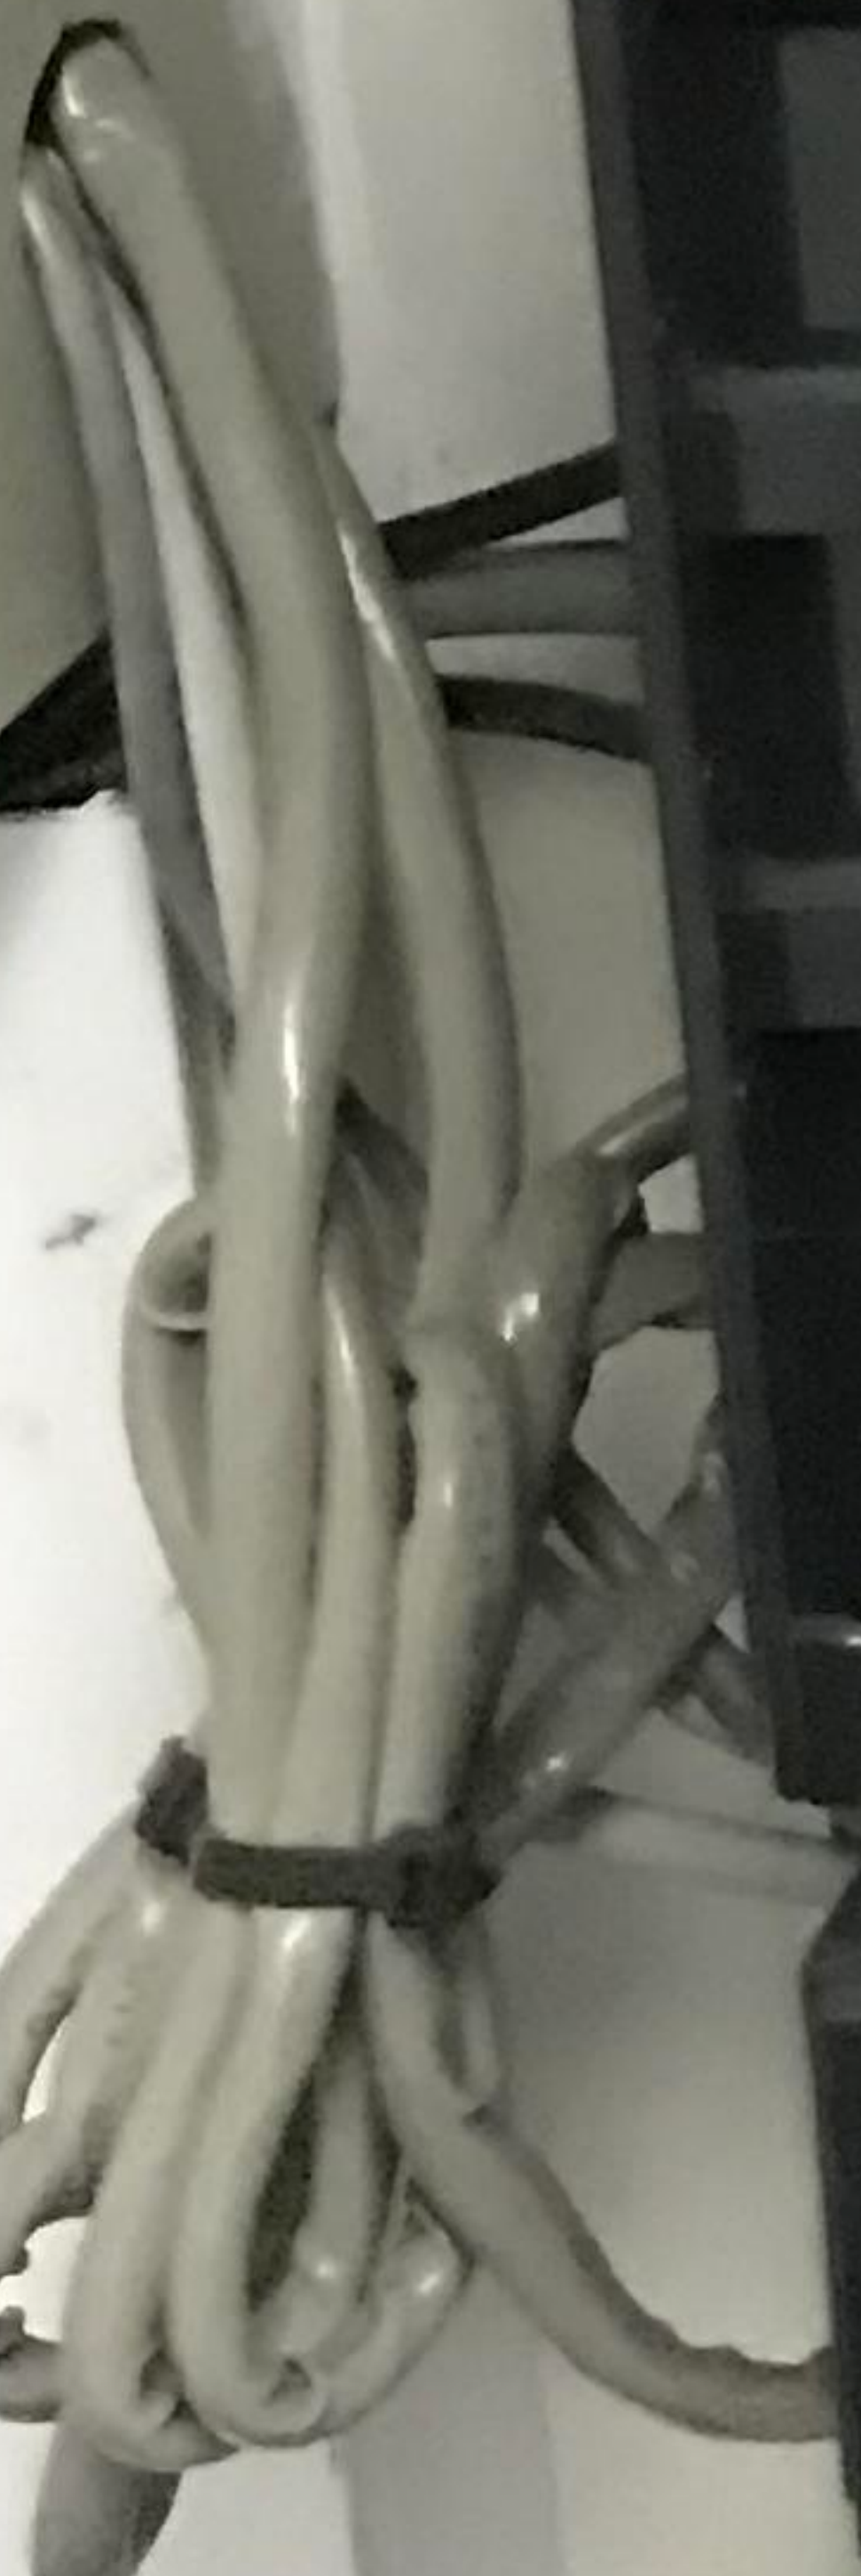

S/N

Vonage

DX-SRV-4PF-01

5

4

3

2

1

32026190



FX Q502USB



USB INTERFACE

PHONES



MIC

LINE IN



BAL OR UNBAL



LINE IN 4/5



MAIN OUT



GAIN



BAL



EQ HIGH 12 kHz



LEVEL



COMP 1



PHANTOM



2-TRACK

IN

OUT



EQ LOW 80 Hz




BAL



PAN

CLIP

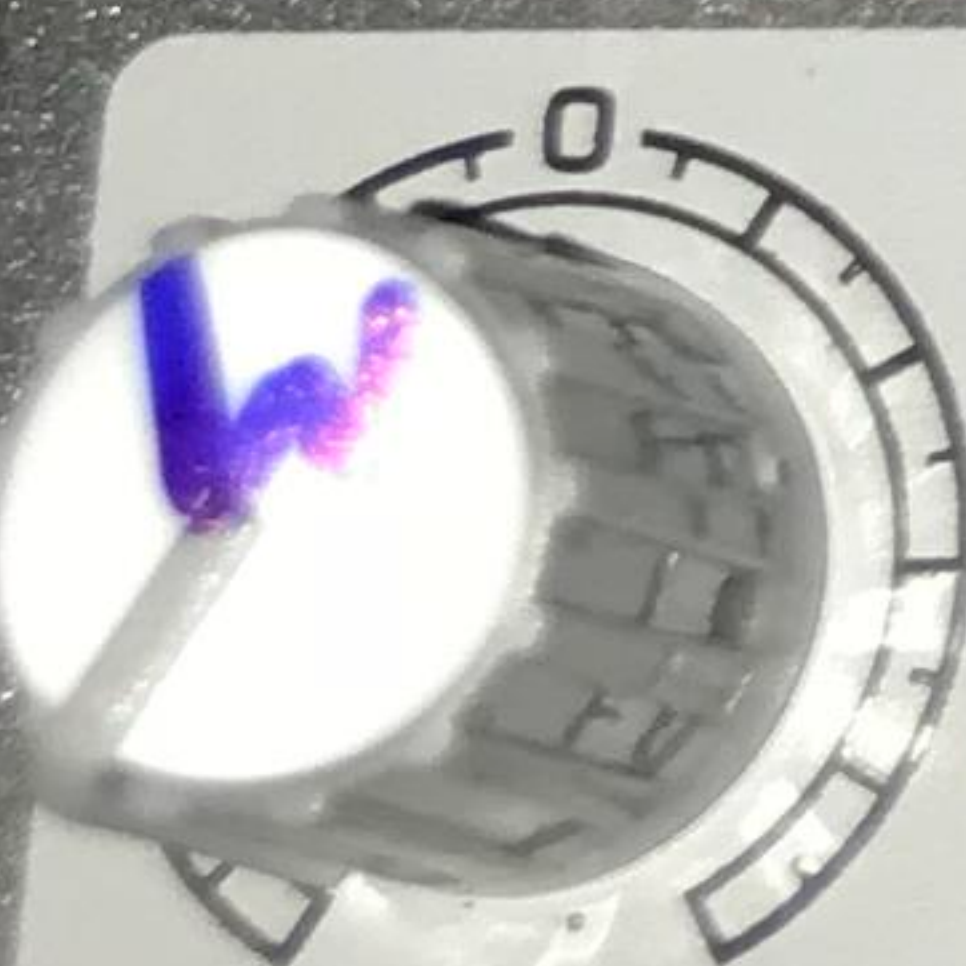

LEVEL



LEVEL



TO PHONES

TO MAIN MIX

USB/2-TRACK

POWER PHANTOM

CLIP


-6-

-0-

-20-

L

R

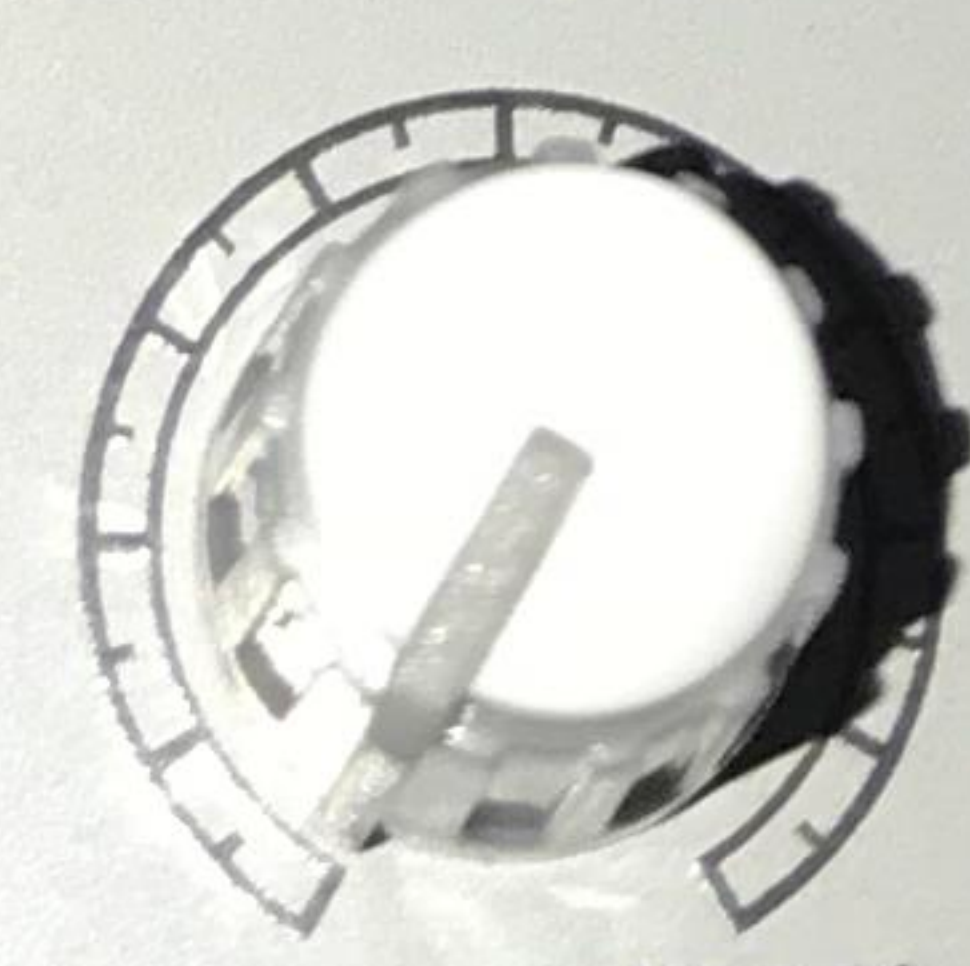

PHONES



MAIN MIX